


Epitaxial Planar NPN Transistor

KTC3205

■ Features

- Collector Power Dissipation:  $P_c=500\text{mW}$
- Collector Current:  $I_c=2\text{A}$

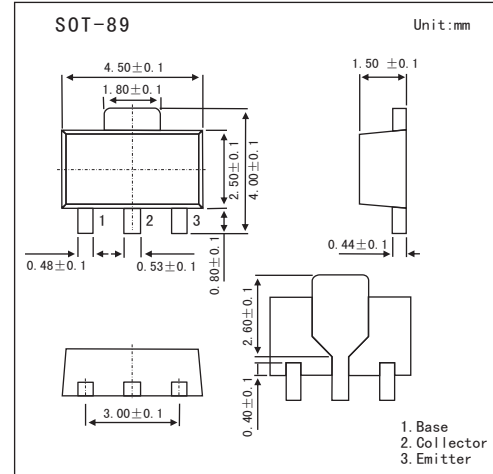

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$

| Parameter                   | Symbol    | Rating     | Unit             |
|-----------------------------|-----------|------------|------------------|
| Collector-base voltage      | $V_{CB0}$ | 30         | V                |
| Collector-Emitter voltage   | $V_{CE0}$ | 30         | V                |
| Emitter-base voltage        | $V_{EB0}$ | 5          | V                |
| Collector Current           | $I_c$     | 2          | A                |
| Collector Power Dissipation | $P_c$     | 500        | mW               |
| Junction Temperature        | $T_j$     | 150        | $^\circ\text{C}$ |
| Storage Temperature Range   | $T_{stg}$ | -55 to 150 | $^\circ\text{C}$ |

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$

| Parameter                            | Symbol        | Test conditons                            | Min | Typ | Max | Unit |
|--------------------------------------|---------------|---|-----|-----|-----|------|
| Collector-base breakdown voltage     | $V_{(BR)CBO}$ | $I_c=1\text{mA}, I_E=0$                   | 30  |     |     | V    |
| Collector-Emitter Breakdown Voltage  | $V_{(BR)CEO}$ | $I_c=10\text{mA}, I_B=0$                  | 30  |     |     | V    |
| Emitter-Base Breakdown Voltage       | $V_{(BR)EBO}$ | $I_E=1\text{mA}, I_c=0$                   | 5   |     |     | V    |
| Collector Cut-off Current            | $I_{CBO}$     | $V_{CB}=30\text{V}, I_E=0$                |     |     | 100 | nA   |
| Emitter Cut-off Current              | $I_{EBO}$     | $V_{EB}=5\text{V}, I_c=0$                 |     |     | 100 | nA   |
| DC Current Gain                      | $h_{FE}$      | $V_{CE}=2\text{V}, I_c=500\text{mA}$      | 100 |     | 320 |      |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_c=1.5\text{A}, I_B=0.03\text{A}$       |     |     | 2.0 | V    |
| Base-Emitter Voltage                 | $V_{BE}$      | $V_{CE}=2\text{V}, I_c=500\text{mA}$      |     |     | 1.0 | V    |
| Transition frequency                 | $f_T$         | $V_{CE}=2\text{V}, I_c=500\text{mA}$      |     | 120 |     | MHz  |
| Collector Output Capacitance         | $C_{ob}$      | $V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$ |     | 13  |     | pF   |

■  $h_{FE}$  Classification

| Rank  | O       | Y       |
|-------|---------|---------|
| Range | 100~200 | 160~320 |